


763550 DIN 11851 MALE SMOOTH REDUCED HOSE CONNECTOR FOR RUBBER HOSE



DIN 11851 Male SMOOTH REDUCED Hose Connector for rubber hose
Material: Aisi 316L (1.4404)

On request:
M.O.C.A. CE 1935/2004

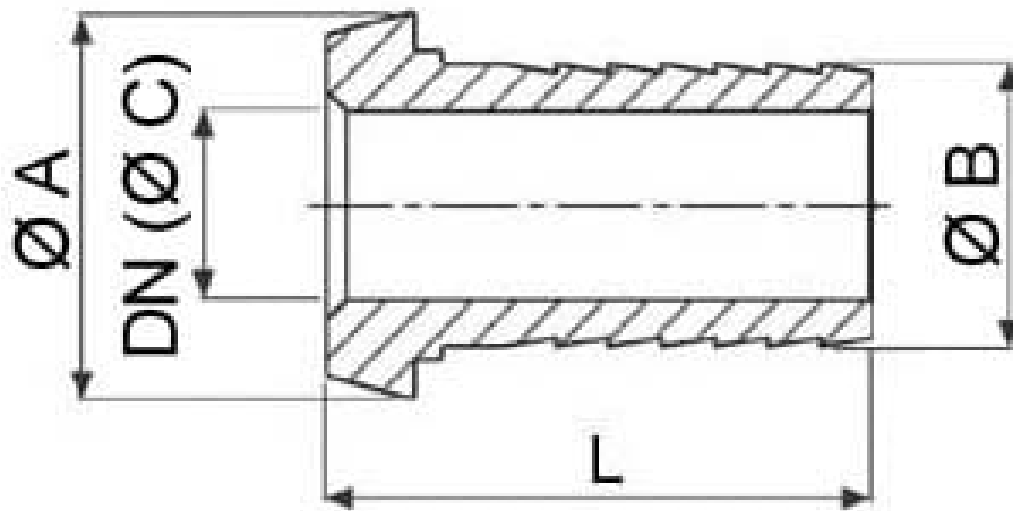

DN (Ø C)	Ø A	Ø B	L	Kg	CODE AISI 304L	CODE AISI 316L
15 (9)	28	13	35	0,03	763550 41400	763550 61400
20 (14)	36	19	44	0,09	763550 42000	763550 62000
25 (14)	44	19	46	0,13	763550 42500	763550 62500
25 (20)	44	25	58	0,14	763550 42600	763550 62600
32 (25)	50	32	62	0,22	763550 43000	763550 63000
40 (25)	56	32	63	0,26	763550 43300	763550 63300
40 (32)	56	40	73	0,30	763550 43400	763550 63400
50 (32)	68	40	74	0,43	763550 43600	763550 63600
50 (40)	68	50	80	0,53	763550 43800	763550 63800
60 (40)	75	50	81	0,59	763550 44000	763550 64000
65 (40)	86	50	85	0,76	763550 44200	763550 64200
65 (50)	86	60	90	0,85	763550 44400	763550 64400
80 (50)	100	60	90	10,4	763550 44600	763550 64600
80 (60)	100	70	90	1,05	763550 44700	763550 64700
80 (65)	100	80	100	1,46	763550 44800	763550 64800
100 (65)	121	80	115	2,05	763550 45300	763550 65300
100 (80)	121	90	115	1,70	763550 45400	763550 65400

